




## Sound Transmission Loss - Acoustic Performance for PEPP Foam (Density @ 2.8 pcf [45 g/l]) Molded from ARPRO<sup>®</sup> Porous Expanded Polypropylene Beads

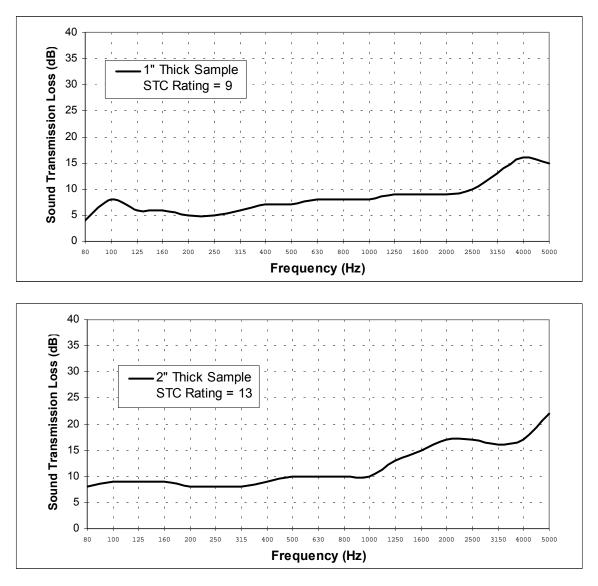

Note: Tested per ASTM E90

ARPRO® is a registered trademark of JSP International. PUBLICATION JSPI ARPRO-45gI-PEPP-STL-2001/08

The information contained herein is based upon the results of limited laboratory tests on test samples of material moded from expanded polypropylene resin manufactured by JSP International. There can be no assurance that the similar results will be achieved in simulated tests or actual use of commercial product molded by customers of JSP International. Product performance may vary substantially depending upon the particular application or processing involved. The listed properties are illustrative only and not the product specifications. All suggestions and recommendations are made without warranty since the conditions of use are beyond JSP International's control. Processing and applications of JSP International foam products can influence molded part performance in many ways. Consequently, processors and/or users are advised that there may be a need to conduct independent tests and experiments in order for them to determine the extent to which they may choose to rely upon such information in their business operations. JSP International information with the use of the information and does not warrant against infringement by reasons of the use of its products in combination with other material or in any process.

